



DecoFILM® Soft Metallics



FABRICS

Cotton, Uncoated Polyester, Fabric Blends, Wool, Linen - **Excluding Nylon**

SIZING

Available Widths (in.): 19.5" only
Available Lengths (ft.): 15', 30', 45', 60', 90' and 162' rolls


THICKNESS

Unpressed: 8 mils/200 microns
Pressed: 4 mils/100 microns

Offers a textured, chrome-like surface. Durable and easy to cut and weed.
Add a fun unexpected metallic finish to your designs. Pressure-sensitive carrier allows easy repositioning.

SPECIAL PRECAUTIONS: **AFTER WASHING**, ALWAYS IRON INSIDE OUT - DO NOT IRON DIRECTLY ON THE FILM.

WE DO NOT RECOMMEND LAYERING THIS MATERIAL. **Please note:** **1)** Re-pressing keeps material looking consistent throughout wash cycles, But it will give it more of a brushed metal appearance. **2)** Splices in rolls may cause material to conform around edges of splice tape, but this will not affect plotter cutting or the finished look. **3)** The white is translucent. **4)** The following colors are translucent in some areas and garment color will show through: Green/Black Camo, Earthtone Camo, Grey Camo, and Blue/Black Camo. **5)** The following colors are slightly translucent, but do not appear to show garment color when pressed: Rainbow Oil, Leopard Silver, and Leopard Gold. **6)** The Holoshine colors have a horizontal line going down the middle of the roll and a vertical line approximately every 29.5". This was part of the manufacturing process and is not a defect.

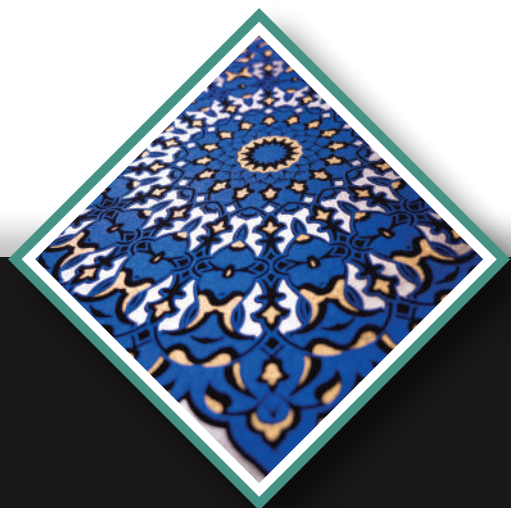

CUTTING

45° Blade Recommended



PRESSING

Extra firm, even pressure



TIMING

7-8 seconds



WASHING

Wash inside out, cold water, gentle cycle, tumble dry, low heat.



MIRRORING

Cut this material in mirror image.



TEMPERATURE

302°F-320°F



PEELING

Peel cold, cover with Teflon™ sheet and re-press for 3-5 seconds.



LASER COMPATIBLE

This product contains no PVC and will not emit hazardous fumes.

COLOR VARIATION: During the manufacturing process, color variation can occur between rolls. This is especially true for Neon colors.

"It's best to test!" Pre-test on an inconspicuous area before applying final production. Some garments require pre-heating and treatment, such as blotting moisture-wicking material with rubbing alcohol, before pressing material. Dye migration may occur with low energy dyes in polyester and blend fabrics. Check for compatibility and pre-treatment suggestions with each product's instructions. The user assumes all risk and liability, whatsoever, in connection with the use of this product. Specialty Materials cannot guarantee performance for conditions not under manufacturer's control and is not responsible for issues due to third-party material qualities. Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective by manufacturer.

©2022 Specialty Materials & Digital Decoration, LLC. | All rights reserved | Tulsa, OK 74107 | 877-437-8556
Tech Help: tech@specialtymaterials.com | Sample Request: samples@specialtymaterials.com