



## FABRICS

Cotton, Uncoated Polyester, Fabric Blends, Polyester/Acrylic, and Similar Fabrics - **Excluding Nylon**

## SIZING

Available Widths (in.): 12", \*16", and 20"  
(\*16" - check availability)  
Available Lengths (ft.): 15', 30', 45', 60', 90', and 162' rolls  
Sheets: 12" x 20" (check sheet availability)

## THICKNESS

3.9-4.3 mils/100-110 microns


Offers a smooth and soft shimmery finish. Stretchy and very durable.

Weeds easily - you can achieve very fine-detailed designs. Pressure-sensitive carrier enables easy weeding and repositioning.

**Special Precautions:** \*This product cannot be layered. \*\*Starred colors are slightly translucent and will take on the color of the garment, especially on dark garments.

**Tech Tips:** For best results, perform test cuts.

**Color Variation:** During the manufacturing process, color variation can occur between rolls. This is especially true for Neon colors.

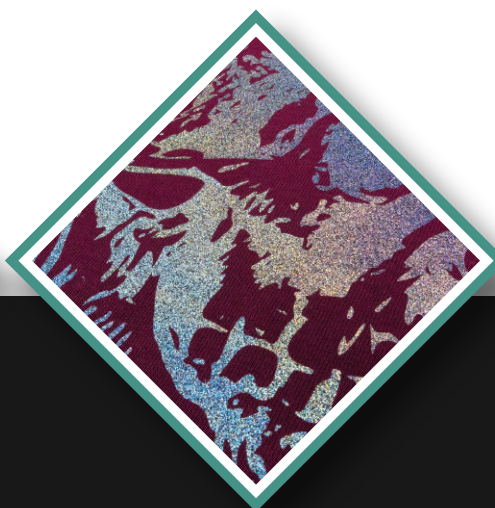

### CUTTING

45° Blade



### PRESSING

Medium, even pressure



### TIMING

8-10 Seconds



### WASHING

Wash inside-out, cold water, gentle cycle, tumble dry low.



### MIRRORING

Cut this material in mirror image.



### TEMPERATURE

300°F



### PEELING

Peel cold



### LASER COMPATIBLE

This product contains no PVC and will not emit hazardous fumes.

**"It's best to test!"** Pre-test on an inconspicuous area before applying final production. Some garments require pre-heating and treatment, such as blotting moisture-wicking material with rubbing alcohol, before pressing material. Dye migration may occur with low energy dyes in polyester and blend fabrics. Check for compatibility and pre-treatment suggestions with each product's instructions. The user assumes all risk and liability, whatsoever, in connection with the use of this product. Specialty Materials cannot guarantee performance for conditions not under manufacturer's control and is not responsible for issues due to third-party material qualities. Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective by manufacturer.

©2022 Specialty Materials & Digital Decoration, LLC. | All rights reserved | Tulsa, OK 74107 | 877-437-8556

Tech Help: [tech@specialtymaterials.com](mailto:tech@specialtymaterials.com) | Sample Request: [samples@specialtymaterials.com](mailto:samples@specialtymaterials.com)