FROSTY CLEAR

- Thin and transparent, UV-resistant, polyurethane film with a semi-matte finish
- Designs can be layered with other products
- On dark fabrics, this adds a fashionable tone on tone look
- Manufactured without the pressure-sensitive carrier for easy stacking



PLS-9000

Acceptable Fabrics

Cotton, Uncoated Polyester, Cotton/Polyester, Polyester/Acrylic Excluding Nylon


Thickness

3 mils/75 microns

Sizing Available

Available Widths (in.): 12", 15", 20", and 30" Available Lengths (ft.): 15', 30', 45', 60', and 90' rolls

Sheets: 12" x 15" | Packs of 10

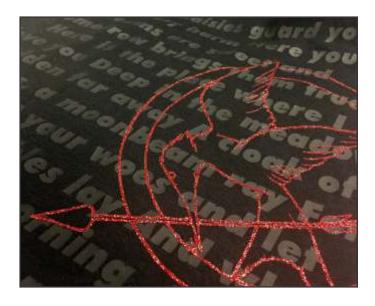







45° Blade Recommended



Cut this material in mirror image



320°F - 330°F



Medium, even pressure



15 Seconds



Peel cold then cover with a Teflon Sheet and re-press for 5 seconds



Wash warm, tumble dry normal. Suitable for dry-cleaning.

SpecialtyMaterials.com | 877.437.8556



Test on dazzle cloth and other moisture-wicking polyesters. Moisture-wicking materials have better adhesion when washed and dried using no fabric softener or blotted with rubbing alcohol before pressing. Be advised that dye migration has occurred with low energy dyes in polyester and poly-blend fabrics. All technical information and recommendations are based on tests we believe to be reliable. However, we cannot guarantee performance for conditions not under manufacturer's control. Before using, please determine the suitability of product for its intended use. The user assumes all risk and liability, whatsoever, in connection with the use of this product. Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective by manufacturer.