



DecoFLOCK® Premium Plus



FABRICS

Cotton, Uncoated Polyester, Fabric Blends, Spandex, Lycra, Wool, Linen, and Nylon

SIZING

Available Widths (in.): 19.5" only
Available Lengths (ft.): 15', 30', 45', 60', and 81' rolls


THICKNESS

14 mils/350 microns

Our most plush velvety flock product. Has excellent cutting properties. Weeds easily and has great wash resistance. Pressure-sensitive carrier enables easy weeding and repositioning.

Special Precautions: Will NOT stretch. *This product cannot be layered. PLEASE NOTE: These instructions have changed, depending on color. Be sure to use the settings provided on your roll. Test before doing large runs.

Color Variation: During the manufacturing process, color variation can occur between rolls. This is especially true for Neon colors.

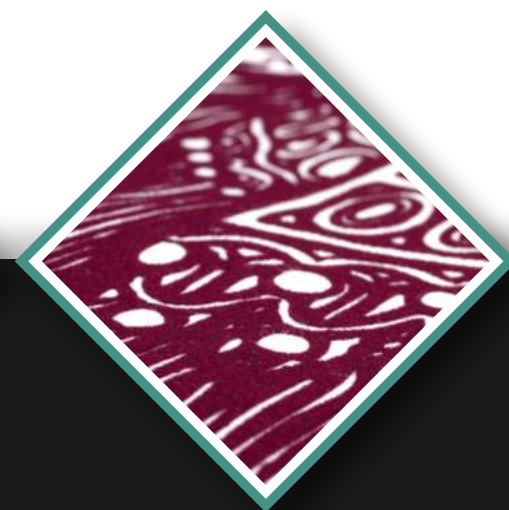

CUTTING

60° Blade



PRESSING

Low to Medium even pressure.



TIMING

15 seconds



WASHING

Can be washed and dried at medium temperatures. Suitable for dry-cleaning.



MIRRORING

Cut this material in mirror image.



TEMPERATURE

320°F



PEELING

Peel warm



LASER COMPATIBLE

This product contains no PVC and will not emit hazardous fumes.

"It's best to test!" Pre-test on an inconspicuous area before applying final production. Some garments require pre-heating and treatment, such as blotting moisture-wicking material with rubbing alcohol, before pressing material. Dye migration may occur with low energy dyes in polyester and blend fabrics. Check for compatibility and pre-treatment suggestions with each product's instructions. The user assumes all risk and liability, whatsoever, in connection with the use of this product. Specialty Materials cannot guarantee performance for conditions not under manufacturer's control and is not responsible for issues due to third-party material qualities. Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective by manufacturer.

©2022 Specialty Materials & Digital Decoration, LLC. | All rights reserved | Tulsa, OK 74107 | 877-437-8556

Tech Help: tech@specialtymaterials.com | Sample Request: samples@specialtymaterials.com