



GlitterFlex® Printable



CPSIA
COMPLIANT

FABRICS

Cotton, Uncoated Polyester, Fabric
Blends, Wool, and Linen -
Excluding Nylon

SIZING

Available Widths (in.): 19.5" only
Available Lengths (ft.): 15, 30', 45', 60', 75',
and 90' rolls


THICKNESS

Regular Colors:
0.4-12 mils/260-300 microns
Neon Colors:
14.8-16.8 mils/470-320 microns

Designed for use with all Solvent/Eco-Solvent inks. Offers high-quality prints with a shimmering glitter finish.
Contains actual polyester glitter particles. This product to be sublimated onto, creating endless design possibilities.

SPECIAL PRECAUTIONS: We do not recommend layering textured materials. Please note: the DH White may have a rough texture on the backside, but testing has shown it to not effect the print finish.

COLOR VARIATION: During the manufacturing process, color variation may occur between rolls. This is especially true for Neon colors.

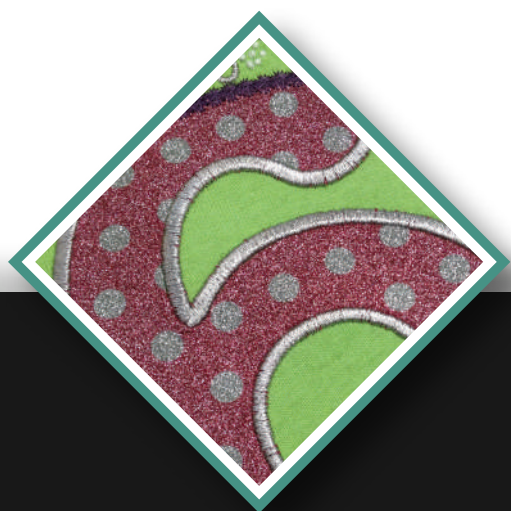

CUTTING

60° Blade Recommended



PRESSING

Cover with a Teflon™ sheet, using firm,
even pressure.



TIMING

15 seconds



WASHING

Wash inside out, gentle cycle, cold water,
tumble dry low.



LASER COMPATIBLE

This product contains no PVC and will
not emit hazardous fumes.



MIRRORING

Print and cut this material "right reading".



TEMPERATURE

330°F-335°F



PEELING

Peel warm, use a
Teflon™ sheet and
re-press for 2 seconds



TAPE

For solvent printing, use HFIX-FLCK to transfer
the image to the garment. If sublimating,
do not use a mask. Use solid designs &
press using a Teflon™ sheet.

"It's best to test!" Pre-test on an inconspicuous area before applying final production. Some garments require pre-heating and treatment, such as blotting moisture-wicking material with rubbing alcohol, before pressing material. Dye migration may occur with low energy dyes in polyester and blend fabrics. Check for compatibility and pre-treatment suggestions with each product's instructions. The user assumes all risk and liability, whatsoever, in connection with the use of this product. Specialty Materials cannot guarantee performance for conditions not under manufacturer's control and is not responsible for issues due to third-party material qualities. Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective by manufacturer.

©2022 Specialty Materials & Digital Decoration, LLC. | All rights reserved | Tulsa, OK 74107 | 877-437-8556

Tech Help: tech@specialtymaterials.com | Sample Request: samples@specialtymaterials.com